




NATIONAL GLASS
DISTRIBUTION

Dimensional Tolerances: Curved Laminated Glass

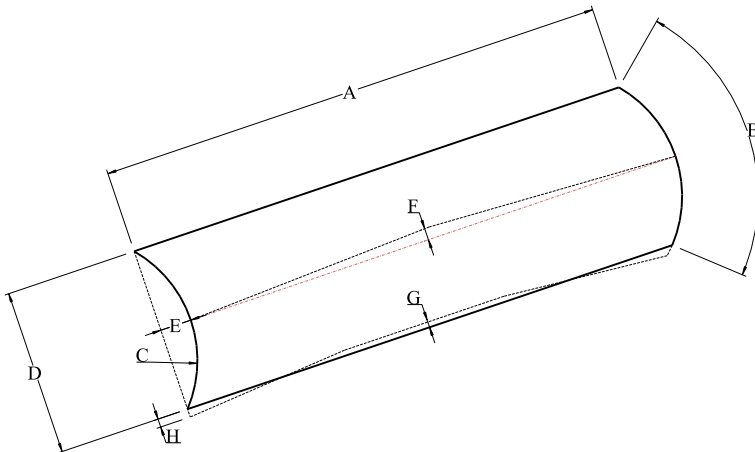

A Height	(+1)	(-1)
B Girth	(+1)	(-1)
C Radius	(+5)	(-5)
D Chord	(+15)	(-15)
E Dip	(+5)	(-5)
F Cross Curvature	(+5)	(-5)
G Pull-in	(+5)	(-5)
H Edge Lift	(+10)	(-10)

Recommendations to Customers:

Due to critical bending and laminating criteria, we recommend that you take into consideration the indicated tolerances.

On bent glass it is most likely that plus/minus 10mm on the curved sides of the panels will flatten out on the edges. This is caused by various influencing factors during the bending process.

Customers will therefore be requested to make allowances for this on the frames or fixtures which will house the glass panels.

For technical advice ask our **MSAGI** Team

 +27(0)10 593 8400 |  msagi@natglass.co.za |  www.natglass.co.za